

MAIN FEATURES

Comfortable positions



Manual leg-rest and backrest adjustment from - 5 ° forward to bed position

Two headrest options



Possibility to choose between fixed headrest and articulated one, that can be adjusted in its inclination

Sturdy armrests



Detachable armrest in Polyurethan

Stable base



Metal base and elegant ABS carter with reduced size

Foot control



Up/down foot control for the electric height adjustment


Optional application



Optional application of wheels (2 + 2 with brake)

TECHNICAL DETAILS

NAME	VALUE
Power supply tension	230Vac-50/60 Hz
Low tension Linak column	24 Vdc
Lifting column push	2000 N
Backrest push	800 N
Legrest push	600 N
Lifting Capacity	145 Kg
Absorbed power	90 V.A.
Fuses protection	1,6 A
Chair weight	60 Kg
Base lenght	740 mm
Maximum legrest height	550 mm

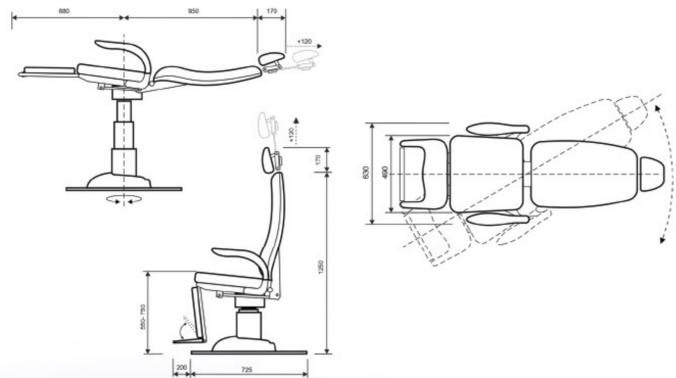

AVAILABLE COLORS

Classic



Metallic



Euroclinic



ENT



PODIATRY



MULTIPURPOSE CHAIRS



STERILIZATION



ENDOSCOPY LINE

Medi-Care Solutions s.r.l.

Contact

Phone: +39 0542 642046

Fax: +39 0542 642355

info@euroclinic.it | www.euroclinic.it

Made in Italy

Registered Office

Via Della Zecca, 1 - 40121 Bologna (BO) Italy

Operative & Administrative Office:

Via Pietro Nenni, 3 - 40026 Imola (BO) Italy

Euroclinic®

MediCareSolutions



BASIC SOLUTION

ENT treatment set

OTOCOMPACT "PLUS" VERSION AND OTOP/V PROFESSIONAL

EUROCLINIC.IT

OTOCOMPACT "PLUS" VERSION

Basic Range ENT Treatment Unit representing EUROCLINIC proposal for a modular system



EUROCLINIC UNIQUE FEATURES

Instrument tablet



Active instruments on articulated arm with wide excursion and rotation

Start/Stop function




Auto start/stop function for active instruments upon lifting /replacing;

Solid steel structure




Solid case in steel painted with epoxy powders.

Mobile workstation

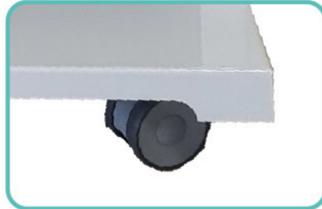

Antistatic rubber castors for an easier mobility.

Wide range colors

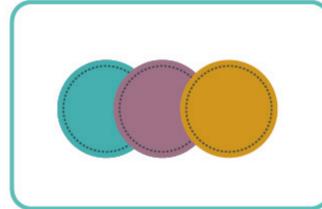

20 nuances for an elegant and sophisticated design

Linear working top



Non-porous surface to ensure maximum infection control. 3 materials available: laminated wood, Corian or tempered glass


Standard Applications

- Powered Suction System (50 lt/min - 70 lt/min) complete with integrated suction jar (1 lt. capacity)
- Hydrophobic Filter
- Ear Funnel
- 2 supports for Head Lamp

Optional Applications

- Up to 10 drawers combination for instruments storage
- EXTRA DRAWERS MODULE for instruments' storage or for housing stand-alone equipment
- Second suction system
- Single use suction jar (1 or 2 lt. capacity)
- Automatic Discharge system
- Connection to the main water system
- Insufflation system with analogic manometer
- Auricular Washing syringe with fixed temperature at 37°
- Application of medicament kit for pulverization of powder and liquid medicaments
- Up to 8 endoscope supports - integrated in the unit's structure
- Application of heated endoscopes holders
- Larynx mirror warmer
- Integrated Led light source with 1,2 or 3 channels
- Led Light source with hand-piece for direct connection to endoscopes
- Pole support for microscope and articulated arm for monitor
- Video Endoscopy system
- Microscope
- Video Nystagmoscope
- Rhinomanometer

TECHNICAL DETAILS

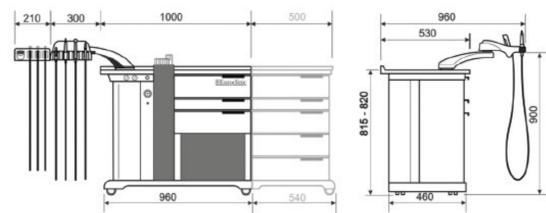

NAME	VALUE
Power supply tension	220 VAC ± 10%
Frequency	50 Hz
Absorbed power (MAX conf.)	1200 VA
Weight	135 Kg / 175kg
Maximum instruments nr.	4

Insufflator air capacity	2.6 l/m (variance until 250 Kpa)
Oil free suction motor	-86 KPa (-650 mm Hg, 50L/min)
Suction with oil motor	-86 KPa (-650 mm Hg, 50L/min)
Fuses power supply	F1, F2 = 6,3A T
Fuse external Plug	F3 = 4A T

OTOP/V PROFESSIONAL

Stylish and Mechanical evolution for the historical OTOP/V range



OTOCOMPACT "PLUS" UNIQUE FEATURES

Extra module



additional module for instruments. Possibility to upgrade treatment unit

Integrated Led lights



Up to 4 Integrated LED Light sources with individual control;

Integrated endoscope holders



Heatable and integrated endoscope holders;

OTOP/V PROFESSIONAL UNIQUE FEATURES

Telescopic column



New electric vertical lifting system with telescopic column - wider excursion and lifting capacity;

Upper part rotation



360° rotation - lockable / unlockable in any position through bilateral handle

Retractable foot support



New Folding and Pelted footrest